


GX KA-BAND **BROADBAND** **CONNECTIVITY**

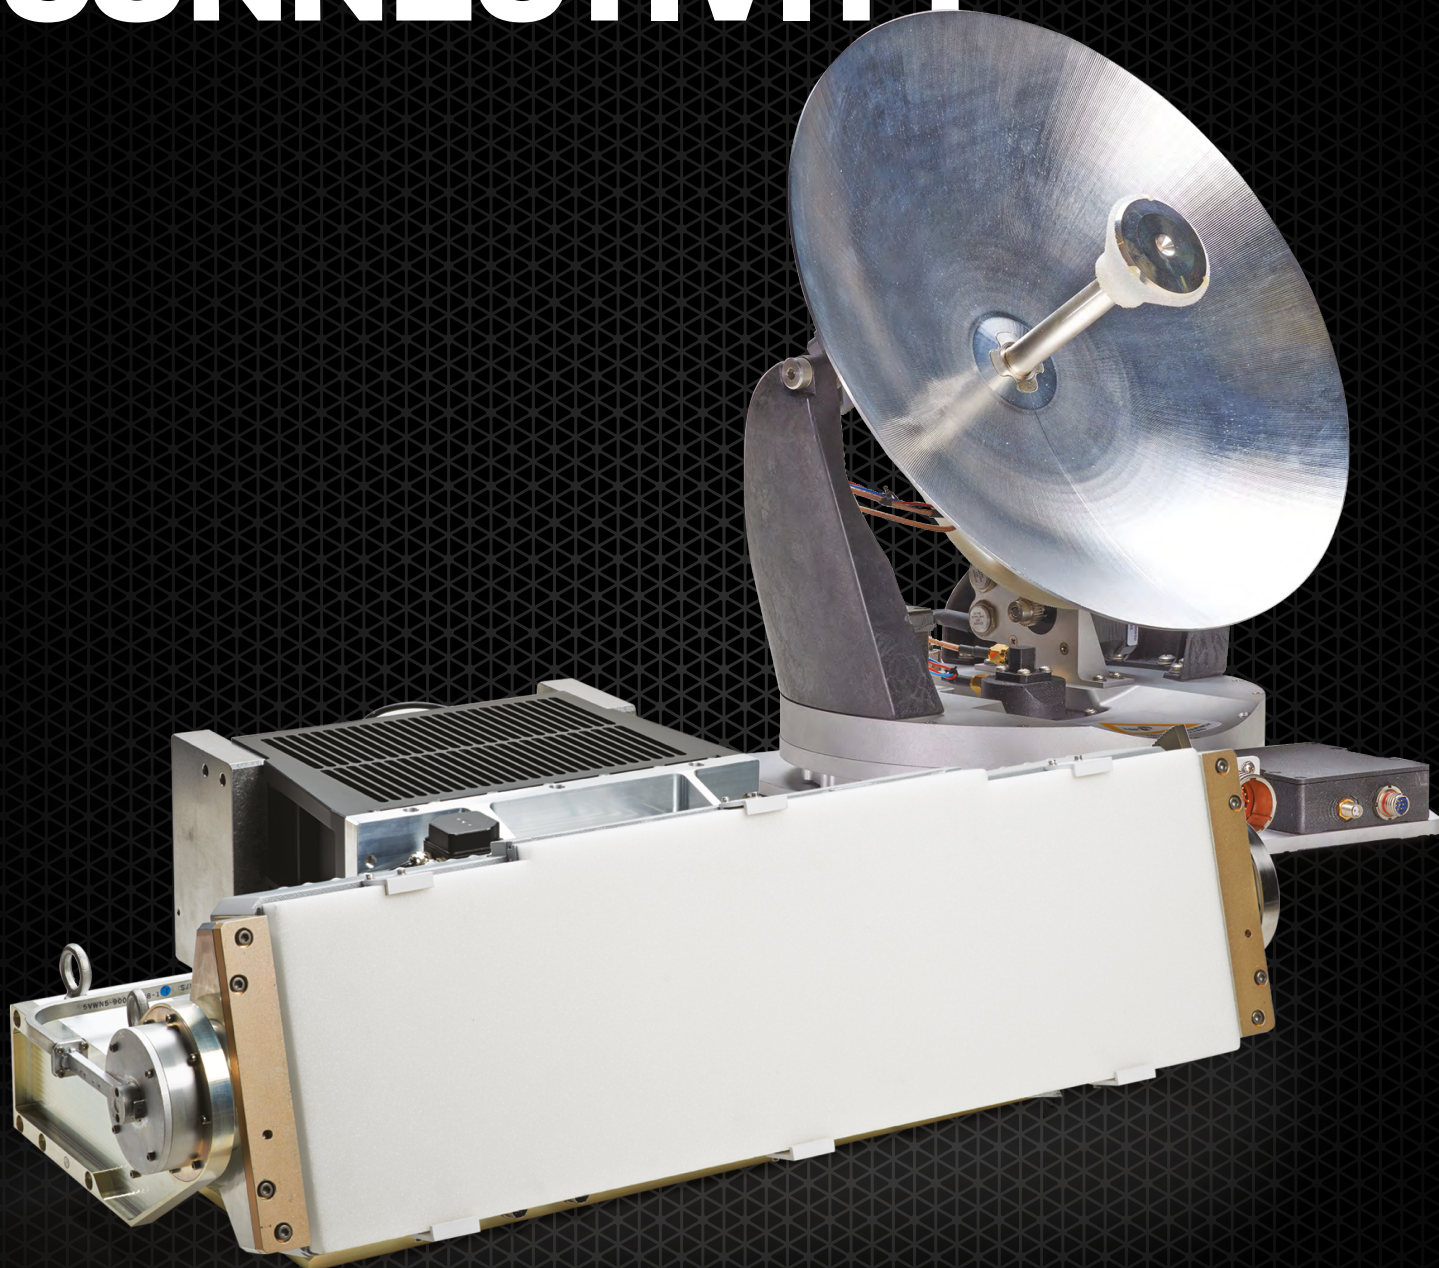


Honeywell

HONEYWELL JETWAVE MCS-8000/MCS-8100 SATCOM SOLUTIONS


Honeywell's JetWave™ satellite communications terminals enable global consistent connectivity via Inmarsat Aviation's Global Xpress (GX) Ka-band network.

Designed to provide broadband-class data connectivity, the hardware and network are optimized for mobility to provide a consistently outstanding passenger experience all over the world. Passengers can experience the same Wi-Fi connection at 40,000 feet as they would on the ground.

These two MCS (Multi-Channel Satcom) configurations use identical RF and antenna controller, modem and router components, with the only difference being that the MCS-8000 uses a tail-mounted antenna and the MCS-8100 uses a fuselage mounted antenna.

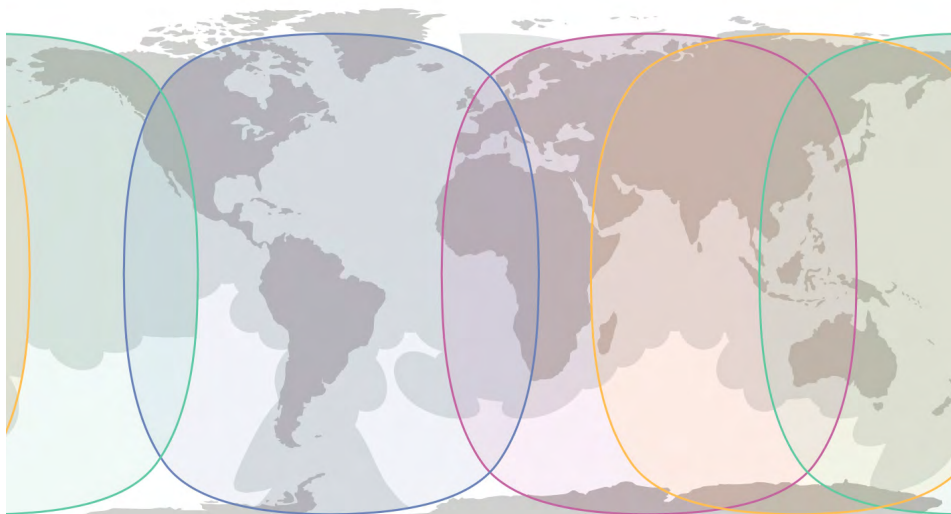

Global Xpress Coverage Map

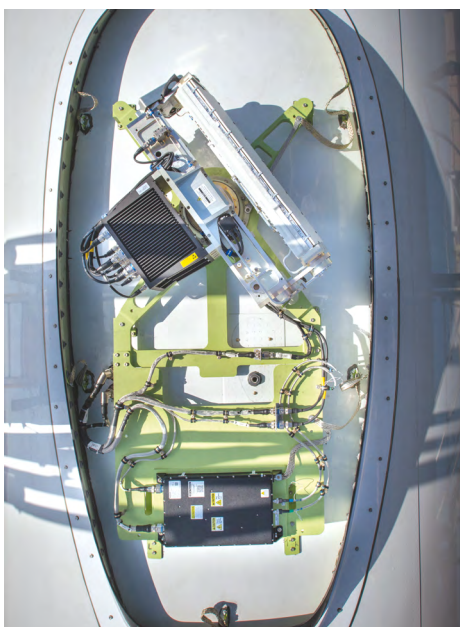

KEY MISSION FACTS

- System operates on Inmarsat Aviation's Global Xpress Ka-band network, with four satellites covering the entire globe (polar regions excepted)
- True global broadband class connectivity
- FMA capable of speeds up to 50 Mbps
- TMA capable of speeds up to 30 Mbps
- Committed Information Rates (CIRs)
- Service offered through industry-leading Distribution Partners (DPs)
- Worldwide support through Distribution Partners, Honeywell service depots, and Inmarsat ground network and product experts
- Service available now

COMPONENTS



Fuselage Mount Antenna
Air Transport Aviation



Tail Mount Antenna
Business Aviation

Both systems include a common RF and antenna controller, modem and router.



KRFU



KANDU



ModMan



SYSTEM DESCRIPTION		SPECIFICATIONS
CGX KA-BAND ANTENNAS AND TERMINALS		
Network Support		Operates on the Inmarsat's GX Ka-band network Fuselage-mounted antenna (MCS-8100) or Tail-mounted antenna (MCS-8000) Both systems include a common RF and antenna controller, modem and router
Interfaces		115 V / 400Hz AC Power Multi-Ethernet data ARINC 429 from aircraft navigation bus Honeywell.com

SYSTEM DESCRIPTION		SPECIFICATIONS
ModMan		Size 5.02" x 15.32" x 7.88" 4MCU Weight: 14.0 lbs
KRFU		Size: 3.23" x 18.05" x 9.01" Weight: 11.3 lbs
KANDU		Size: 4.74" x 11.02" x 9.06" Weight: 8.7 lbs
Fuselage Mount Antenna		Size: 35.72" swept volume x 9.39" high Weight: 83.0 lbs
Tail Mount Antenna		Size: 8.12" x 11.7" x 13.75" 12" max swept volume Weight: 10.0 lbs

RANDOM HARDWARE OVERVIEW		
MCS-8200		MCS-8000
AIM Kit	LAIM Kit	
Platform agnostic skirt and fitting	Aircraft specific skirt and fitting	Radome and installation kits to be defined on a per platform (STC) basis
Reduced part type count	Lighter weight	
Improved accessibility for install	Lower cost	

Honeywell Aerospace

1944 East Sky Harbor Circle
Phoenix, AZ 85034
aerospace.honeywell.com

A61-1248-000-007 | 06/19
© 2019 Honeywell International Inc.

THE
FUTURE
IS
WHAT
WE
MAKE IT

Honeywell