



M1600HCT-22P-MR

High Performance Passive Iridium/GPS Antenna
Part #: 100-00042-08



Description

The M1600HCT-22P-MR is a rugged high performance passive antenna designed for the Iridium/ GPS band, and built on Maxtena proprietary Helicore® technology. This technology provides exceptional pattern control, polarization purity and high efficiency in a very compact form factor. The M1600HCT-22P-MR is a screw-on design, featuring an integrated SMA connector. The ultra-light design is rated IP-67 when both mounted and unmounted for added protection. This product is designed for applications requiring high quality reception of the Iridium network.

Electrical Specification

Parameter	Design Specifications	
Frequency	1616-1626 MHz (Iridium)	1575 MHz (GPS)
Polarization	RHCP	
Antenna element peak gain	-0.5 dBic (typical)	
Efficiency	25% (typical)	
Bandwidth (-1dB)	20 MHz	
Axial Ratio	1 dB (typical) / 1.5 dB (max)	
VSWR	1.5 (max)	
Impedance	50 Ohm	
Operating temp.	from -40°C to 85°C	
RF connector	SMA	
Overall dimensions	38 mm (height) x 18.5 mm (diameter)	

Features


- Iridium/GPS bands
- Very low axial ratio
- IP-67 mounted and unmounted
- Ultra light weight
- Ground plane independent

Applications

- Vehicle and fleet tracking
- Military & security
- Asset tracking
- Seismic recording instruments
- Oil & gas industries
- Navigation devices
- Mining equipment
- LBS & M2M applications
- Handheld devices


Realized gain plot

Measured at 1575 MHz

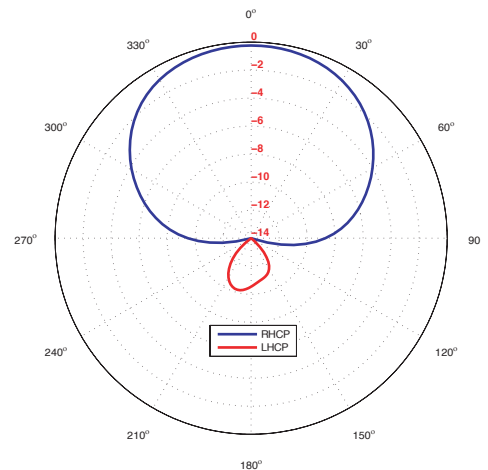


Maxtena Inc.
7361 Calhoun Place, Suite 102
Rockville, MD 20855
1-877-629-8362
info@maxtena.com
www.maxtena.com

DRAWING REVISION HISTORY			
REV	DESCRIPTION	DATE	BY
A	INITIAL RELEASE	2022-05-27	SZ

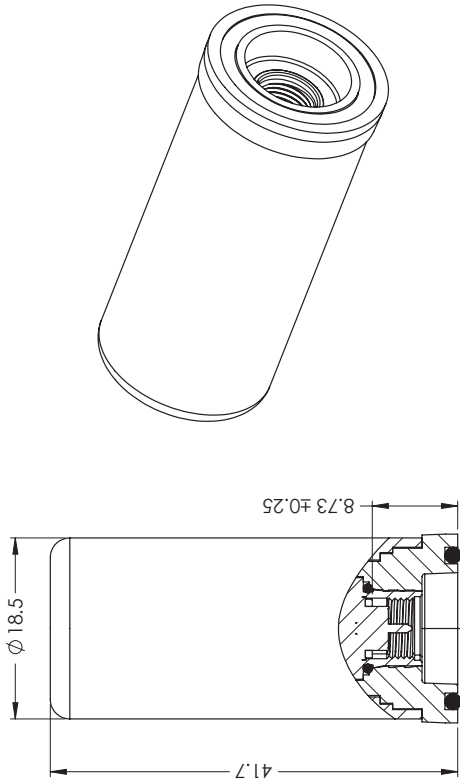

NOTES:

1. FREQUENCY (Iridium/GPS): 1616-1626 MHz, 1575 MHz
2. CONNECTOR TYPE: SMA-MALE.
3. HOUSING MATERIAL: ABS/PC.
4. COLOR: BLACK.
5. DUST AND WATER-RESISTANCE: IP 67.
6. RECOMMEND A 8.55 MM MOUNTING HEIGHT FOR MOUNTING INTERFACE SEALING AND ELECTRICAL CONNECTION.
7. ASSEMBLY TORQUE SHALL BE NO MORE THAN 8 IN*LB.

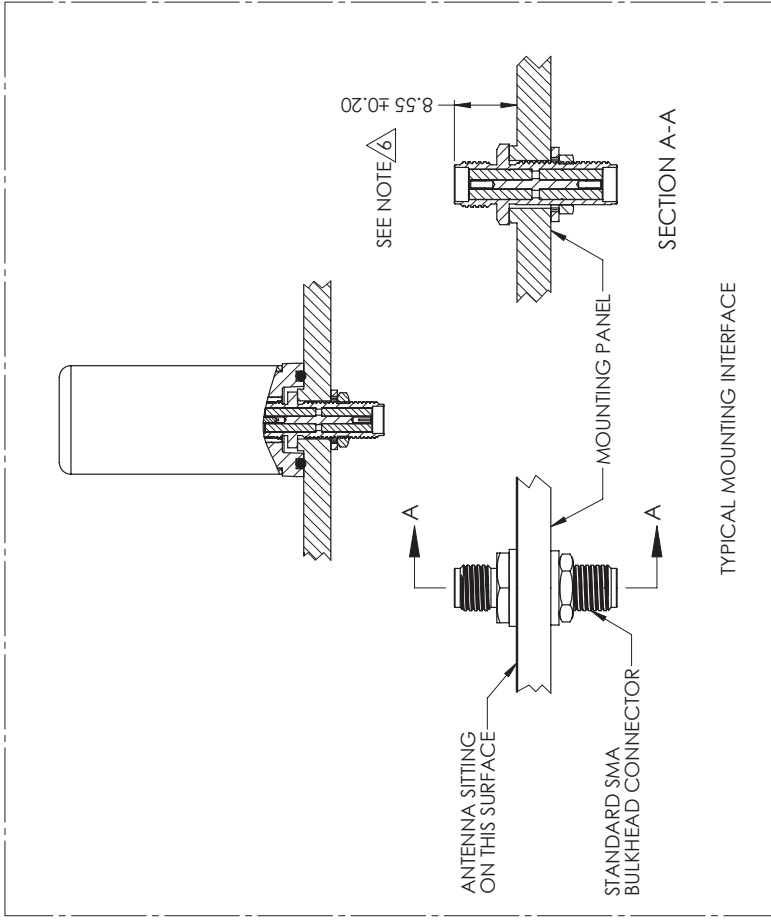

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MM		NAME	DATE
TOLERANCES: FRACTIONAL: DECIMAL: INTEGRAL: ONE PLACE DECIMAL: TWO PLACE DECIMAL: INTERPRET GEOMETRIC TOLERANCING PER:	DRAWN	SZ	2022-05-27
	CHECKED	ZK	2022-05-27
	ENG APPR.	NPC	2022-05-27
	MFG APPR.		
THIRD ANGLE PROJECTION DO NOT SCALE DRAWING		CAD MAINTAINED. CHANGES SHALL BE INCORPORATED BY THE DESIGN ACTIVITY.	
MAXTENA, INC		SIZE	DWG. NO.
		B	117-00413-08
		100-00042-08	REV
		M1600HCT-22P-MR	A
		CAGE CODE: 5KQH7	SCALE: NONE
			SHEET 1 OF 1

ITEM 100-00042-08 REVISION HISTORY			
REV	DESCRIPTION	DATE	BY
A	INITIAL RELEASE	2022-05-27	SZ

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MAXTENA, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MAXTENA, INC IS PROHIBITED.

PROPRIETARY AND CONFIDENTIAL