

ME A-1600-EXP

GNSS and Iridium Adhesive Mount
Part #: 189-00026-01

Description

The MEA-1600-EXP adhesive Antenna is a 2-in-1 antenna solution, with high gain and efficiency ideal for maintaining constant global connectivity via Iridium. The MEA-1600-EXP covers all GPS/GLONASS/Galileo and Iridium frequencies. This is an ideal antenna for Iridium SBD, navigation and telematics systems, IoT applications and remote connectivity. This adhesive mount antenna is easy to install with maximum durability. The MEA-1600-EXP has a two cables with a SMA-Male standard connector, 3m standard cable length and is fully customizable by offering additional connector types, cable lengths and cable types. This antenna is low profile, rugged and ground plane independent. It is compatible with any Iridium SBD transceiver.

Cable 1:

Parameter	Specification	
Frequency Range	1575.42 MHz	1598-1606 MHz
Band	1575 MHz	1602 MHz
Return Loss	≤ -15 dB	
VSWR	$\leq 1.4:1$	
Impedance	50 Ω	
Radiation Pattern	Hemispherical	
Polarization	Saw Filter Type	
Active Gain	28 dB @ 2.7 V	
Noise Figure	1.5 dB Typ	
Voltage	1.5 – 3.6	
Current Consumption	9 mA Typ	
Power Consumption	24.3 mW Typ	
ESD Protection	2kV	



Features

- 2in 1 antenna (GPS/GLONASS/QZSS/Galileo, and Iridium)
- Adhesive Mount
- High Gain & Efficiency
- Low Profile
- High Performance
- Customizable Cable and Connector

Applications

- Iridium SBD
- Satellite IoT applications
- Telematic
- Navigation
- Satellite Communications
- Remote surveillance
- Monitoring







Cable 2:







Parameter	Specification
Frequency Range	1616-1627 MHz
Band	1621 MHz
Return Loss	-18.8 dB
VSWR	1.2:1
Efficiency	76%
Peak Gain	4.5 dBic
Average Gain	-1.1 dB
Impedance	50 Ω
Axial Ratio	≤ 3 dB
Radiation Pattern	Hemispherical
Polarization	RHCP

Mechanical Specification


Parameter	Specification
Antenna Dimensions	80 x 76 x 13/16 mm
Operating Temperature	-40°C to 85°C
Connector Type	SMA-Male Standard
Mounting Type	Adhesive Mount
Radome	ABS
Radome color	Black
Substance Compliance	RoHS

*Mounted on 70 x 70 mm Ground Plane

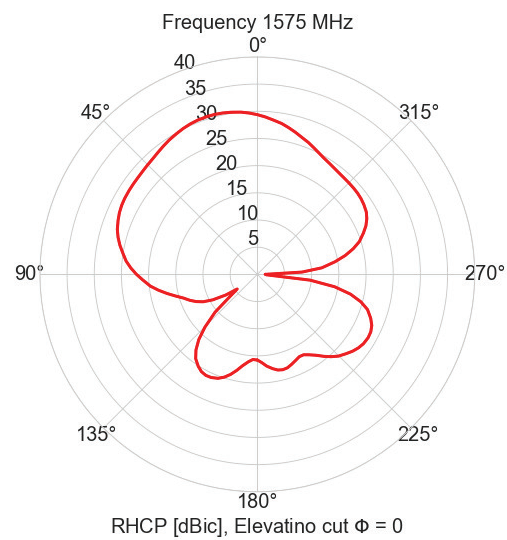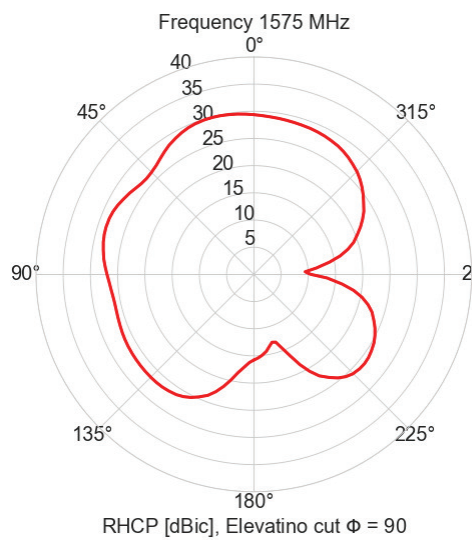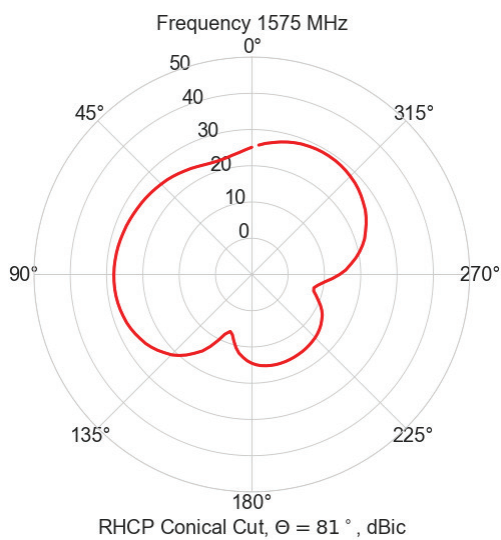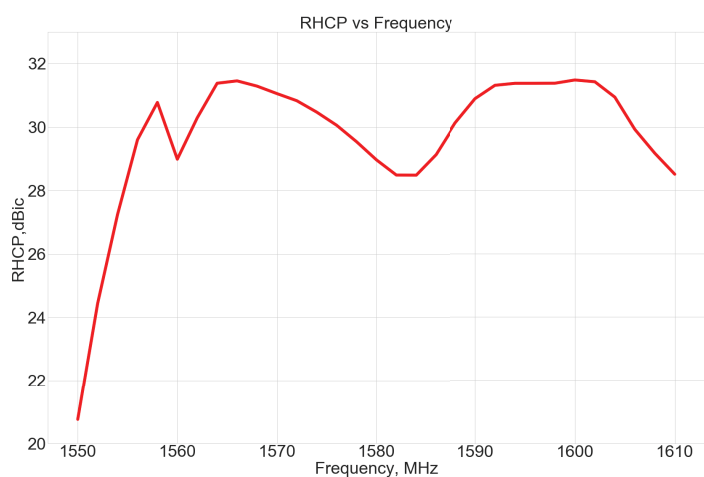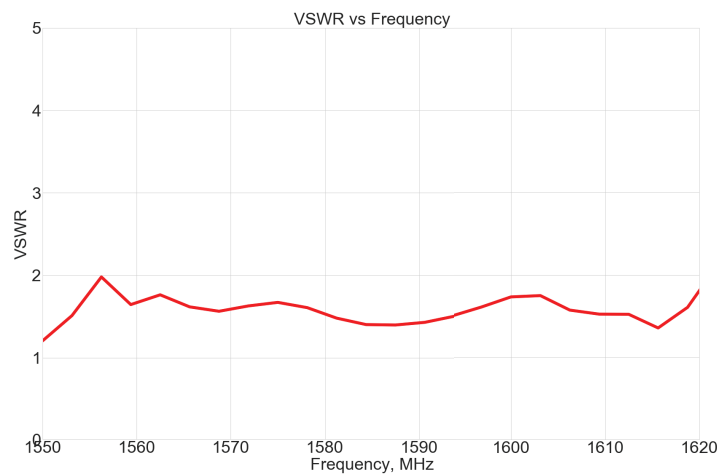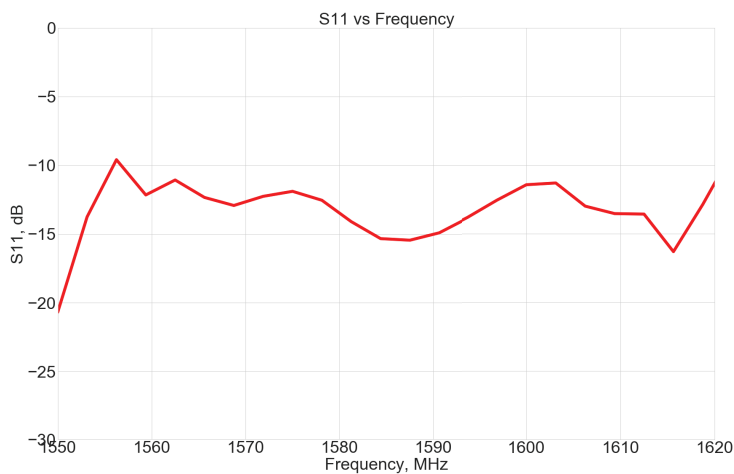

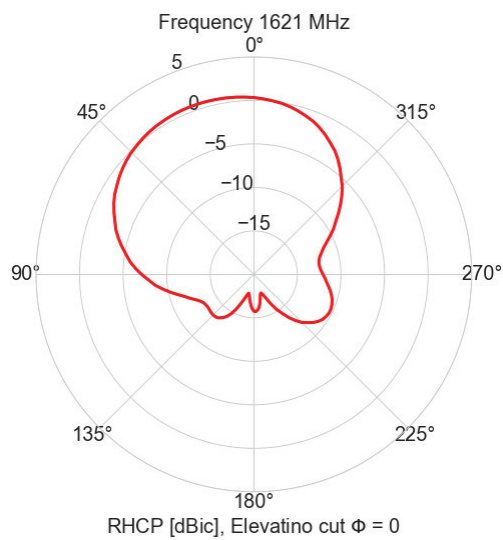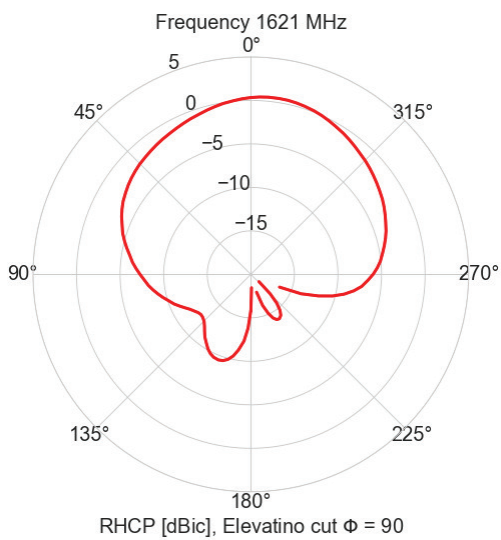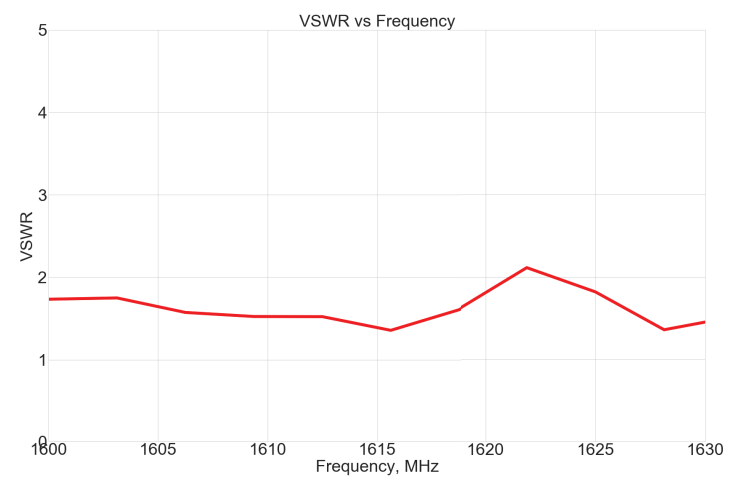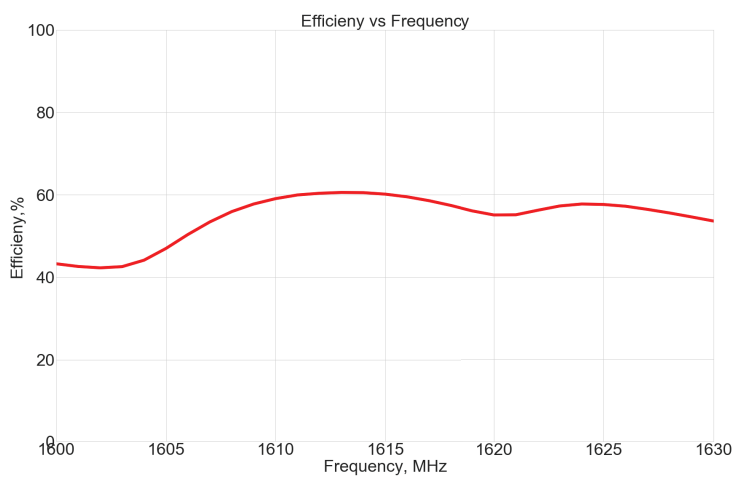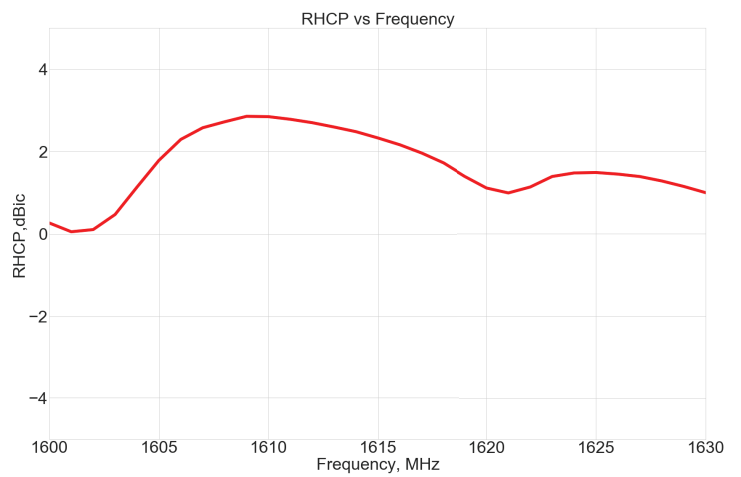
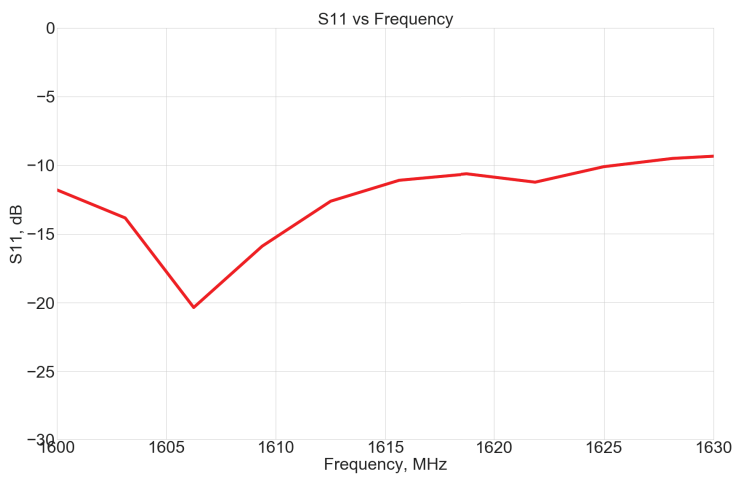


DRAWING REVISION HISTORY			
REV	DESCRIPTION	DATE	BY
A	INITIAL RELEASE	2021-06-17	SZ

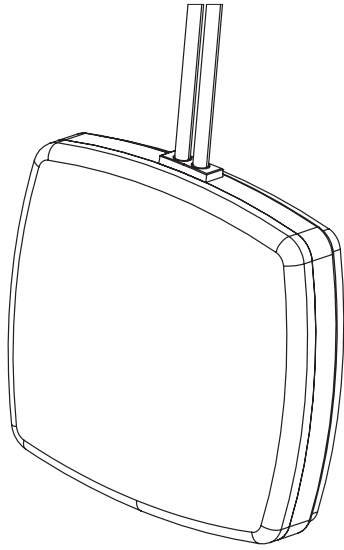

NOTES:

- FREQUENCY:
Cable 1: GPS/QZSS/GALILEO/GLONASS: 1559 ~1610 MHz
Cable 2: IRIDIUM: 1616 ~ 1627 MHz
- IMPEDANCE:
Cable 1: 50 OHM
Cable 2: 50 OHM
- POLARIZATION:
Cable 1: RHCP
Cable 2: RHCP
- VSWR:
Cable 1: <2
Cable 2: <2
- HOUSING MATERIAL: BLACK ABS
- MOUNTING TYPE: ADHESIVE MOUNT
- CUSTOMIZABLE CABLE AND CONNECTOR
- OPERATING TEMPERATURE: -40 °C TO +85 °C
- STORAGE TEMPERATURE: -40 °C TO +85 °C

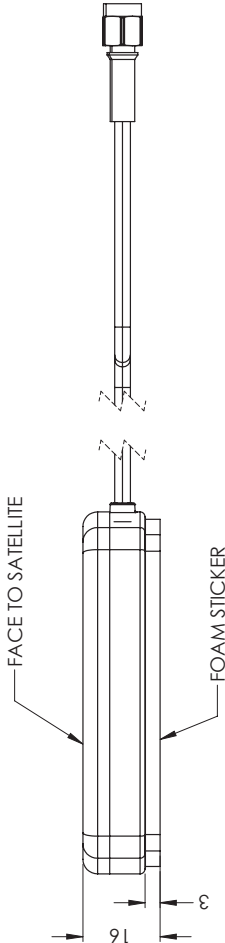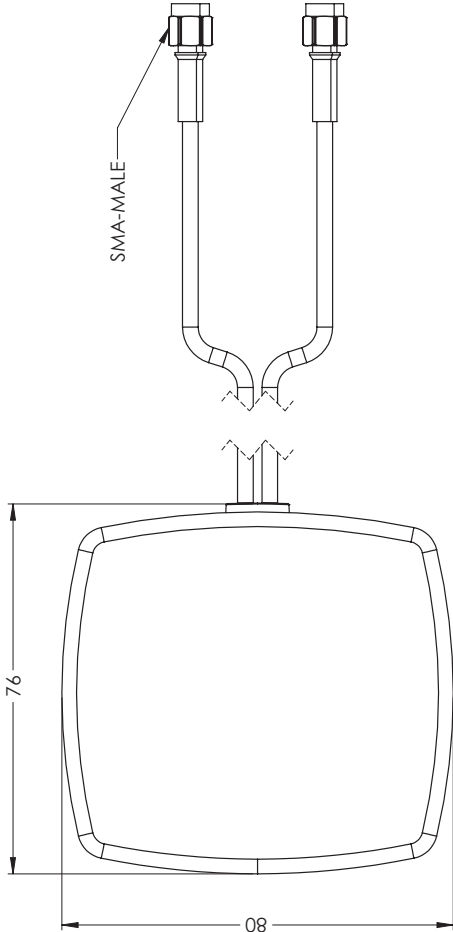

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MM TOLERANCES: FRACTIONAL: DECIMAL: INTEGRAL: ONE PLACE DECIMAL: ± 1.0 TWO PLACE DECIMAL: ± .50 INTERPRET GEOMETRIC TOLERANCING PER: THIRD ANGLE PROJECTION DO NOT SCALE DRAWING	DRAWN CHECKED ENG APPR. MFG APPR. Q.A.	NAME SZ ZX NPC	DATE 2021-06-17 2021-06-17 2021-06-17
--	--	-------------------------	--

MAXTENA, INC		TITLE: 189-00026 MEA-1600-EXP	
--------------	--	-------------------------------------	--

ITEM 189-00026 REVISION HISTORY				189-00026 CONFIGURATION TABLE				PROPERTY AND CONFIDENTIAL			
REV	DESCRIPTION	DATE	BY	DASH NO	CABLE LENGTH	CABLE TYPE	CONNECTOR TYPE	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MAXTENA, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MAXTENA, INC IS PROHIBITED.			
A	INITIAL RELEASE	2021-06-17	SZ	-01	3m	CABLE 1: LL100 CABLE 2: LL100	SMA MALE	SIZE DWG. NO. B 117-00424-01	SCALE: NONE	SHEET 1 OF 1	REV A