

i9W

World's First & Only Global Satellite TV Service Reception
85cm Ku-band Marine Satellite Antenna



Global satellite services compatibility

Intellian i9W provides the ultimate convenience to connect you up to thousands of Free TV, Pay TV, Standard Definition, and High Definition programming all over the world with one LNB module which incorporates multi (8) LO frequencies.

Hands-free WorldView™ LNB module

The 2nd generation, patent-pending WorldView LNB module is the latest innovation from Intellian. Unlike other TVRO system LNB's with $\pm 1,000$ kHz stability, the Intellian WorldView LNB module is built on the highest stability of ± 10 kHz which has 100 times more accuracy and greater signal sensitivity.

In addition, this LNB module receives multi-band and multi-polarization satellite TV services around the globe. Therefore, boaters don't need to manually change the LNB inside the antenna dome each time the vessel crosses into a different satellite service region.

DVB-S2 digital TV reception

Some of the HD TV services have moved onto DVB-S2 and will be more in the future. Thanks to Intellian's groundbreaking DVB-S2

digital TV technology, now boaters are able to enjoy their favorite DTH (Direct To Home) entertainment at sea, just like home.

Global satellite library

The i9W includes the pre-programmed global satellite library which allows boaters to select the desired satellite while travelling from region to region. Once the satellite is selected the WorldView LNB module will automatically switch to the corresponding local frequency to receive the signal.

Wireless connectivity & Aptus mobile

The built-in Wi-Fi enables the ACU to be wirelessly connected. PCs, laptops and smartphones can be used to connect to the ACU and monitor, control and change the settings of the system wirelessly. Intellian Aptus mobile is available for download to access to the ACU via Wi-Fi and operate the antenna from their iPhone, iPad or other network devices. iPhone and iPad are registered trademarks of Apple Inc.

i9W 85cm Ku-band 2-axis Marine Satellite Antenna Systems

Technical Specifications

Physical

Radome Height	121cm / 47.5"
Radome Diameter	113cm / 44.5"
Reflector Diameter	85cm / 33.5"
Weight	56.2kg / 124lbs

Environmental

Operating Temp. Range	-25°C to +55°C / -13°F to +131°F
Storage Temp. Range	-40°C to +80°C / -40°F to +176°F
Water Ingress	IPX6
Approvals	CE / FCC
Warranty	3 years parts and 2 year labor

Performance

Reception Frequency	Ku-band (10.7~12.75GHz)
Polarization	Circular and Linear
Minimum EIRP	44dBW
Azimuth Range	680°
Elevation Range	-15° to +90°
Ship's Motion	Roll ±25°, Pitch ±15°
Roll & Pitch Response Rate	30° / sec
Turning Rate	30° / sec
RF Output	Dual / Quad Output

Antenna Control Unit

Dimensions (WxDxH)	17.8cm x 21.7cm x 5.4cm / 7" x 8.5" x 2.1"
Weight	1.2kg / 2.6lbs
Display	2 line 20 Character VFD module
GPS Interface	Built-in (NMEA 0183 GPS)
Power Requirement	9.0~30.0V DC
Power Consumption	Typ. 30W, Max. 50W

LNB LO Frequencies


Local Oscillator Frequency	Polarization	Area
11.250 GHz	Dual Circular	North America, Russia
10.500 GHz	Dual Circular	Latin America
10.750 GHz	Single Circular	Korea
10.750 GHz	Dual Circular	China
10.678 GHz	Single Circular	Japan
11.300 GHz	Dual Linear	South East Asia
10.700 GHz	Dual Linear	Australia
Universal Low: 9.75 GHz High: 10.6 GHz	Quad Linear	Europe, Middle East, Africa, some Asia countries

Note

- LNB stability: ±25 kHz (Except at Universal 9.75 GHz)
- LNB LO frequencies can be extended
- LNB LO frequencies are automatically changed according to target satellites
- Polarization can be switched between circular and linear

System Diagram


LNB Output	RF1	RF2	RF3	RF4
Dual	•	•	-	-
Quad	•	•	•	•

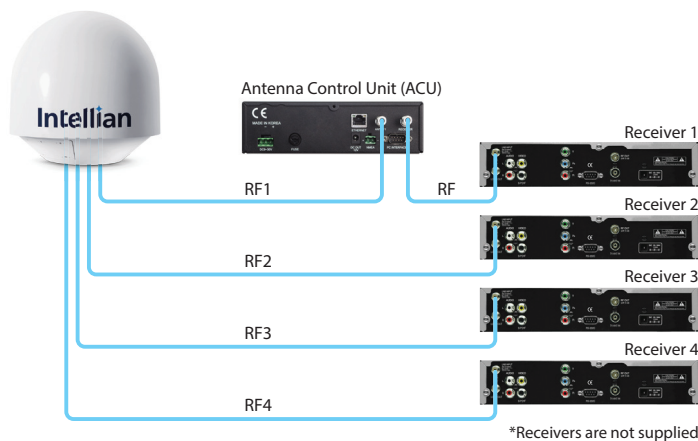

Key Features

- Global Satellite TV Services Compatibility
- Built-in WorldView LNB Module
- DVB-S2 Signal Identification
- Built-in GPS and auto LNB pol control system
- Built-in pre-programmed global satellite library

Coverage Map

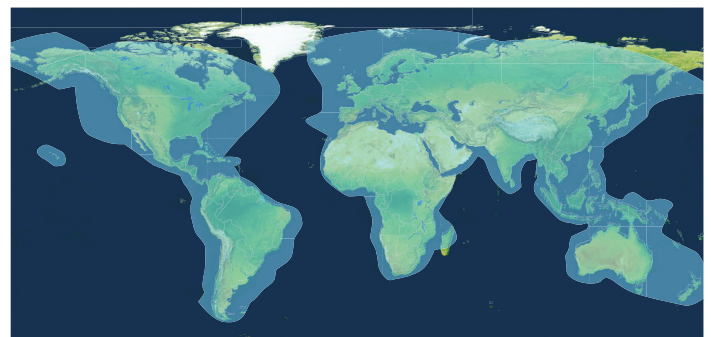

Intellian

Global HQ
Innovation Center
Intellian Technologies, Inc.
T +82 31 379 1000
F +82 31 377 6185

APAC
Seoul
Intellian Technologies, Inc.
T +82 2 511 2244
F +82 2 511 2235

Americas
Irvine
Intellian Technologies USA, Inc.
T +1 949 727 4498
F +1 949 271 4183
Toll Free +1 888-201-9223

EMEA
Rotterdam
Intellian B.V.
T +31 1 0820 8655
F +31 1 0820 8656